

**3/8 Inch Diameter –  
Minimum Tensile Strength 4,650 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8634	4	3	16.2
J8634-1/2	4-1/2	3	16.4
J8635	5	3	17.6
J8635-1/2	5-1/2	3	20.0
J8636	6	3	21.6
J8637	7	4	24.0
J8638	8	4	26.4
J8640	10	4	32.0

**Bolts, Carriage**

**Hot Dip Galvanized**

Joslyn carriage bolts are roll threaded with square shoulder and square nut.


**1/2 Inch Diameter –  
Minimum Tensile Strength 8,500 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8644-1/2	4-1/2	3	34.3
J8645	5	3	35.3
J8646	6	3	40.5
J8647	7	4	44.0
J8648	8	4	51.0

**Bolts, Clevis**

**Hot Dip Galvanized**

Joslyn 5/8-inch diameter clevis bolts have cone points and are furnished with one square nut and one 1/2-inch diameter machine bolt, with nut and self-locking cotter pin.

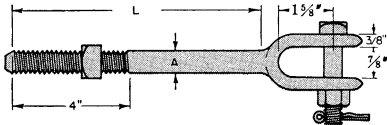

Catalog No.	A Diameter (Inches)	L Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J7810	5/8	10	172
J7812	5/8	12	192
J7814	5/8	14	208