


Bolts, Double Arming

Hot Dip Galvanized

Joslyn Double Arming Bolts are roll threaded, with cone points at both ends for easy driving and removal without



damage to threads. "D.A." bolts are furnished with four square nuts. Length dimensions do not include the points.

5/8-Inch Diameter – Minimum Tensile Strength 13,550 Lbs.

Catalog No.	Bolt Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8860	10	18
J8862	12	136
J8864	14	142
J8866	16	158
J8868	18	187
J8870	20	192
J8872	22	208
J8874	24	224
J8876	26	240
J8877	28	256
J8878	30	264
J8879	32	284
J8880	34	295
J8881	36	332


3/4-Inch Diameter – Minimum Tensile Strength 20,050 Lbs.

Catalog No.	Bolt Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8882	12	196
J8884	14	220
J8886	16	240
J8888	18	260
J8890	20	284
J8892	22	304
J8894	24	336
J8896	26	345
J8897	28	365
J8898	30	386
J8899	32	400
J9003	34	420
J9004	36	460

Bolts, Machine, "A" Cable Suspension

Hot Dip Galvanized

"A" Cable Suspension Bolts are supplied with two square nuts. One nut is used to fasten the square head bolt to the pole and the other nut is used to secure a straight or angle cable suspension clamp to the bolt.

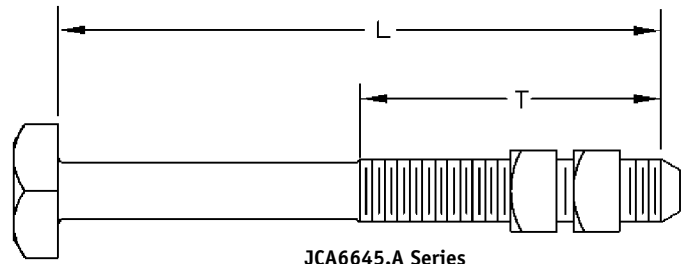

Minimum Tensile Strength: 5/8" = 13,550 lbs.;
3/4" = 20,050 lbs.; 1" = 36,350 lbs.

Catalog No.	Bolt Diameter (Inches)	"L" Bolt Length (Inches)	"T" Thread Length (Inches)	Weight (Lbs. Per 100 Pcs.)
JCA6645.A01	5/8	8	4	85
JCA6645.A02	5/8	10	6	104
JCA6645.A03	5/8	12	6	120
JCA6645.A04	5/8	14	6	138
JCA6645.A05	5/8	16	6	153
JCA6645.A06	5/8	18	6	168
JCA6645.A07	5/8	20	6	192
JCA6645.A10	3/4	10	6	165

Catalog No.	Bolt Diameter (Inches)	"L" Bolt Length (Inches)	"T" Thread Length (Inches)	Weight (Lbs. Per 100 Pcs.)
JCA6645.A11	3/4	12	6	187
JCA6645.A12	3/4	14	6	204
JCA6645.A13	3/4	16	6	220
JCA6645.A14	3/4	18	6	245
JCA6645.A15	1	12	6	360
JCA6645.A16	1	14	6	410
JCA6645.A17	1	16	6	450