


Bolts, Machine *(continued)*

Hot Dip Galvanized

Square Head and Square Nut



5/8-Inch Diameter – Minimum Tensile Strength 13,550 Lbs.

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8801-1/2	1-1/2	1-1/4	30.0
J8802	2	1-3/4	34.0
J8802-1/2	2-1/2	2-1/4	38.0
J8803	3	2-3/4	43.5
J8804	4	3	50.0
J8805	5	3	57.0
J8806	6	3	62.0
J8807	7	4	72.0
J8808	8	4	82.0
J8809	9	4	88.0
J8810	10	6	94.1
J8812	12	6	108.0
J8814	14	6	125.0
J8816	16	6	136.0
J8818	18	6	152.0
J8820	20	6	170.0
J8822	22	6	184.0
J8824	24	6	200.0
J8826	26	6	224.0
J8828	28	6	242.0

3/4-Inch Diameter – Minimum Tensile Strength 20,050 Lbs.

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8902	2	1-3/4	56.8
J8903	3	1-3/4	66.8
J8906	6	4	101.0
J8908	8	4	118.0
J8910	10	6	142.0
J8912	12	6	162.0
J8914	14	6	188.0
J8916	16	6	212.0
J8918	18	6	228.0
J8920	20	6	252.0
J8922	22	6	268.0
J8924	24	6	296.0
J8926	26	6	316.0
J8928	28	6	344.0

(7/8-Inch Diameter – Minimum Tensile Strength 27,700 Lbs.

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J9062	12	6	240.0
J9064	14	6	264.0
J9066	16	6	288.0
J9068	18	6	320.0
J9070	20	6	345.0
J9072	22	6	380.0
J9074	24	6	430.0

Bolts, Oval Eye


Hot Dip Galvanized

Joslyn forged oval eyebolts are commonly used with thimbles, clevises and other pole line hardware items for overhead guying and deadending.

Regular oval eyebolts are roll threaded and furnished with one square nut. Double arming eyebolts serve as a combination eyebolt and double arming bolt. They have cut threads and come complete with three square nuts. Both types have cone points to allow driving without damage to the threads and to make the engaging and threading of nuts quicker and easier. Length is measured from below the eye to the last thread.

The J8930 screw eyebolt has rolled gimlet threads for screwing into trees, poles and crossarms.

Bolt Diameter (Inches)	Eye I.D. Width x Length (Inches)	Minimum Ultimate Strength (Lbs.)
5/8	1-1/2 x 2	13,550
3/4	1-1/2 x 2	20,050




**Oval Eyebolts – 5/8 Inch Diameter,
Minimum Tensile Strength 13,550 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J9406	6	4	112
J9408	8	4	128
J9409	9	4	136
J9410	10	6	146
J9412	12	6	156
J9414	14	6	168
J9416	16	6	188
J9418	18	6	212
J9420	20	6	220

**Bolts, Oval Eye (continued)
Hot Dip Galvanized**

**Oval Eyebolts – 3/4 Inch Diameter,
Minimum Tensile Strength 20,050 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J9508	8	4	180
J9510	10	6	200
J9512	12	6	220
J9514	14	6	240
J9516	16	6	256
J9518	18	6	280




**Double Arming Eyebolts – 5/8 Inch Diameter,
Minimum Tensile Strength 13,550 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J9614	14	12	204
J9616	16	14	172
J9618	18	16	224
J9620	20	18	244
J9622	22	20	260
J9624	24	22	280
J9626	26	24	300

**Bolts, Oval Eye (Double Arming)
Hot Dip Galvanized**

**Double Arming Eyebolts – 3/4 Inch Diameter,
Minimum Tensile Strength 20,050 Lbs.**

Catalog No.	Bolt Length (Inches)	Thread Length (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J9636	16	14	300
J9638	18	16	320
J9640	20	18	340
J9642	22	20	360
J9644	24	22	380
J9646	26	24	400

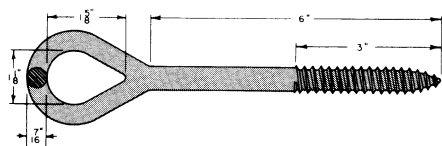

Bolts, Oval Eye

Hot Dip Galvanized

Screw Eyebolts

Catalog No.	Bolt Diameter (Inches)	Approximate Shipping Weight (Lbs. Per 100 Pcs.)
J8930	1/2	62