



Connectors >> Automatics  
Steel, Strandlink®




**Features:**

- Rated to hold a minimum of 90% of RBS strand used

**Application:**

- For splicing applications with overhead or down guy wire.
- "Universal Grade" are recommended for use with Alumoweld, Aluminized, EHS and Galvanized Steel.
- "All Grades" are recommended for use on Common Grade, Siemens-Martin, High Strength Utility Grade, Galvanized and Aluminized steel strand.

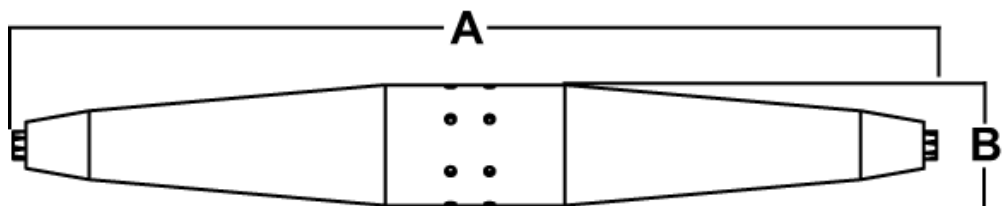

Universal Grade					
Catalog Number	Primary Strand Application	Range (in)	A	B	Standard Pack
5039	3/16"	.145-.215	7.50	1.03	50
5040	1/4"	.215-.270	7.62	1.13	50
5041	5/16"	.270-.315	9.28	1.26	50
5042	3/8"	.325-.392	10.62	1.45	25
5043	7/16"	.392-.455	10.59	1.59	25
5044	1/2"	.455-.520	10.75	1.70	25

All Grade					

Catalog Number	Primary Strand Application	Range (in)	A	B	Standard Pack
4999	<b>3/16"</b>	<b>.185-.193</b>	5.10	.70	50
5000	<b>1/4"</b>	<b>.240-.253</b>	6.40	.90	100
5001	<b>5/16"</b>	<b>.310-.335</b>	7.25	1.04	50
5002	<b>3/8"</b>	<b>.360-.405</b>	8.00	1.25	50



Reducers					
Catalog Number	Primary Strand Application	Range Large End	Range Small End	Standard Pack	
5086	<b>1/4" x 3/16"</b>	<b>.215-.270</b>	.145-.215	25	
5087	<b>5/16" x 1/4"</b>	<b>.270-.315</b>	.215-.270	25	
5022	<b>3/8" x 5/16"</b>	<b>.360-.405</b>	.310-.335	50	
5023	<b>7/16" x 3/8"</b>	<b>.410-.455</b>	.360-.405	25	

[www.maclepower.com](http://www.maclepower.com)

