

# Corning® LEAF® Optical Fiber

## Product Information



### PI1107

Issued: December 2001

Supersedes: September 2001

ISO 9001 Registered

## A Powerful Network Needs: Backbone by LEAF Fiber.

With the ever-accelerating race for bandwidth, network designers are challenged to build a network for the present that will also maximize future technologies. Deploy the fiber that revolutionized network technology and gives you room to move. Break the bandwidth barrier with a fiber so technologically advanced it gives you the optical backbone you need for today's and tomorrow's networks – Corning® LEAF® optical fiber.

**Find out what the world's most powerful networks have in common: Backbone by LEAF fiber.**

### The Large Effective Area Advantage

LEAF fiber's large effective area ( $A_{eff}$ ) offers higher power-handling capability, improved optical signal-to-noise ratio, longer amplifier spacing, and maximum dense wavelength division multiplexing (DWDM) channel plan flexibility compared with other non-zero dispersion-shifted

fibers (NZ-DSFs). Fiber with a large  $A_{eff}$  also provides a critical performance advantage – the ability to uniformly reduce all non-linear effects (Figure 1). Non-linear effects represent the greatest performance limitations in today's multi-channel DWDM systems.


### The Next Generation

In addition to outperforming other NZ-DSFs in the conventional band (C-Band: 1530-1565 nm), LEAF fiber facilitates the next technological development in fiber-optic networks -- the migration to the long band (L-Band: 1565-1625 nm). In both C-Band and L-Band operation, LEAF fiber has demonstrated greater ability to handle more channels by reducing non-linear effects such as four-wave mixing, self-phase modulation and cross-phase modulation in multi-channel DWDM transmission.

## Reduce Network Costs

With its increased optical reach advantage, LEAF fiber requires fewer amplifiers and regenerators, and therefore provides immediate and long-term cost savings. LEAF fiber is also compatible with installed base fibers and photonic components. In fact, LEAF fiber's slightly larger mode-field diameter improves its splicing performance, especially when connecting to standard single-mode fiber such as Corning® SMF-28™ fiber. And, as with all Corning optical fiber, LEAF fiber's geometry package is the best in the industry. With LEAF fiber, it is easy and economical to increase the information-carrying capacity of your network.

**Figure 1**

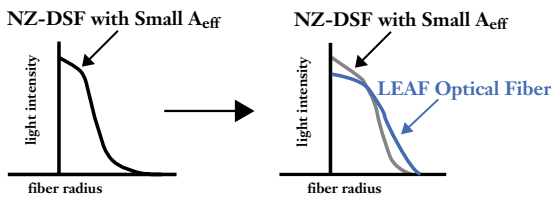

LEAF fiber's larger  $A_{eff}$  increases the area where the light can propagate, thereby reducing non-linear effects.

## Fiber For Today & Tomorrow

While LEAF fiber is exceptionally suited to operate with already-installed 2.5 Gbps systems, it is techno-economically optimized for today's high-channel-count 10 Gbps systems, and provides the ability to upgrade in the future to tomorrow's high bit systems. Additionally, LEAF fiber's unparalleled specifications on polarization mode dispersion (PMD) allow fiber installed today to operate at data rates higher than 10 Gbps. The combination of LEAF fiber's large  $A_{eff}$  and its demonstrated Raman upgradeability allows transmission engineers to design and build networks advantaged over other fiber plants. As the world's most advanced NZ-DSF, LEAF fiber is ready for future technology when your network is.

## LEAF Fiber – All About Value

With LEAF fiber's proven large  $A_{eff}$  advantage, the industry's best geometry package, and inherent future-proof design, LEAF fiber continues to be the fiber of choice for today's high-capacity and tomorrow's all-optical networks. Network providers on the cutting edge have embraced large  $A_{eff}$  technology as the fiber "backbone" for high-data-rate networks now and in the future.

## Technology Awards

Corning Incorporated has received multiple industry awards for its patented LEAF optical fiber. Independent panels of experts have chosen LEAF fiber based on its technical merits for the following awards:

“Annual Technology Award” from Fiberoptic Product News

“Commercial Technology Achievement Award for Fiber-Optics” from Laser Focus World Magazine

“Circle of Excellence Award” from Photonics Spectra Magazine

“R&D 100 Award” from R&D Magazine

## Coating

Corning fiber is protected for long-term performance and reliability by the CPC® coating system. Corning's enhanced, dual acrylate CPC coatings provide excellent fiber protection and are easy to work with. CPC coatings are designed to be mechanically stripped and have an outside diameter of 245  $\mu\text{m}$ . CPC coatings are optimized for use in many single- and multi-fiber cable designs, including loose tube, ribbon, slotted core and tight buffer cables.

## Optical Specifications

Attenuation

$\leq 0.25$  dB/km at 1550 nm

$\leq 0.25$  dB/km at 1625 nm

No point discontinuity greater than 0.10 dB at 1550 nm

Attenuation at  $1383 \pm 3$  nm shall not exceed 1.0 dB/km

Attenuation vs Wavelength		
Range (nm)	Ref. $\lambda$ (nm)	Max Increase $\alpha$ (dB/km)
1525-1575	1550	0.05
1625	1550	0.05

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength ( $\lambda$ ) by more than the value  $\alpha$ . In all cases, a maximum attenuation of  $\leq 0.25$  dB/km applies at 1550 nm and 1625 nm.

Attenuation With Bending			
Mandrel Diameter (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation (dB)
32	1	1550 & 1625	≤0.50
75	100	1550 & 1625	≤0.05

The induced attenuation due to fiber wrapped around a mandrel of a specified diameter.

#### Mode-Field Diameter

9.20 to 10.00 μm at 1550 nm

#### Dispersion

Total Dispersion: 2.0 to 6.0 psec/(nm•km) over the range 1530 to 1565 nm

4.5 to 11.2 psec/(nm•km) over the range of 1565 to 1625 nm

Fiber Polarization Mode Dispersion (PMD)	
	Value (ps/√km)
PMD Link Design Value	≤0.04*
Maximum Individual Fiber	≤0.1

\*Complies with IEC SC 86A/WG1, Method 1, September 1997 (n=24, Q=0.1%)

The PMD link design value is a term used to describe the PMD of concatenated lengths of fiber (also known as PMDQ). This value represents a statistical upper limit for total link PMD.

PMD values may change when fiber is cabled. Corning's fiber specification supports emerging network design requirements for high-data-rate systems operating at 10 Gbps (TDM) rates and higher.

#### Environmental Specifications

Environmental Test Condition	Induced Attenuation (dB/km) 1550 nm
Temperature Dependence -60°C to +85°C*	≤ 0.05
Temperature – Humidity Cycling -10°C to +85°C* and up to 98% RH	≤ 0.05
Water Immersion, 23°C	≤ 0.05
Heat Aging, 85°C*	≤ 0.05

Operating Temperature Range: -60°C to +85°C

\*Reference Temperature = +23°C

#### Dimensional Specifications

Standard Length (km/reel) 4.4 - 25.2\*

\*Longer spliced lengths available at a premium.

#### Glass Geometry

Fiber Curl: ≥ 4.0 m radius of curvature

Cladding Diameter: 125.0 ± 1.0 μm

Core/Clad Concentricity: ≤ 0.5 μm

Cladding Non-Circularity: ≤ 1.0%

Defined as:

$$\left[ 1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

#### Coating Geometry

Coating Diameter: 245 ± 5 μm

Coating/Cladding Concentricity: < 12 μm

#### Mechanical Specifications

##### Proof Test

The entire length of fiber is subjected to a tensile proof stress ≥ 100 kpsi (0.7 GN/m<sup>2</sup>)\*

\*Higher proof test available at a premium.

#### Performance Characterizations

Characterized parameters are typical values.

##### Effective Area ( $A_{eff}$ )

72 μm<sup>2</sup>

##### Effective Group Index of Refraction ( $N_{eff}$ )

1.469 at 1550 nm

##### Fatigue Resistance Parameter ( $n_d$ )

20

##### Coating Strip Force

Dry, 2.8 N (0.6 lbs)

Wet, 14 days room temperature:

2.7 N (0.6 lbs)

#### Consistency with Global Standards

The values in this product information sheet demonstrate Corning® LEAF® fiber's conformity with ITU-T Recommendation G.655, IEC 60793-2 for B4 class fibers and Bellcore/Telcordia GR-20-CORE.

## Dispersion Calculation

$$\text{Dispersion} = D(\lambda) = \left( \frac{D(1565 \text{ nm}) - D(1530 \text{ nm})}{35} * (\lambda - 1565) \right) + D(1565 \text{ nm})$$

$\lambda$  = Operating wavelength up to 1565

$$\text{Dispersion} = D(\lambda) = \left( \frac{D(1625 \text{ nm}) - D(1565 \text{ nm})}{60} * (\lambda - 1625) \right) + D(1625 \text{ nm})$$

$\lambda$  = Operating wavelength from 1565–1625

Special selections of LEAF fiber attributes are available upon request.

## Ordering Information

To order Corning® LEAF® optical fiber, contact your sales representative, or call the Optical Fiber Customer Service Department at **910-784-7659** (North America) and **607-974-7174** (International). Please specify the following parameters when ordering.

**Fiber Type:** Corning® LEAF® Non-Zero Dispersion Shifted Single-Mode Fiber

---

**Fiber Attenuation Cell:** dB/km

---

**Fiber Quantity:** kms

---

**Other:** (Requested ship date, etc.)

---

### Corning Incorporated [www.corning.com/opticalfiber](http://www.corning.com/opticalfiber)

One Riverfront Plaza  
Corning, NY 14831  
U.S.A.

Phone: 800-525-2524 (U.S. and Canada)  
607-786-8125 (International)

Fax: 800-539-3632 (U.S. and Canada)  
607-786-8344 (International)

Email: [cofic@corningfiber.com](mailto:cofic@corningfiber.com)

### Europe

Berkeley Square House  
Berkeley Square  
London W1X 5PE  
U.K.

Phone: 00 800 2800 4800 (U.K.\*, Ireland, France, Germany, The Netherlands, Spain and Sweden)

00 800 781 516 (Italy)

+44 7000 280 480 (All other countries)

Fax: +44 7000 250 450

Email: [eurocofic@corningfiber.com](mailto:eurocofic@corningfiber.com)

### Asia Pacific

Australia  
Phone: 1-800-148-690  
Fax: 1-800-148-568

Indonesia  
Phone: 001-803-015-721-1261  
Fax: 001-803-015-721-1262

Malaysia  
Phone: 1-800-80-3156  
Fax: 1-800-80-3155

Philippines  
Phone: 1-800-1-116-0338  
Fax: 1-800-1-116-0339

Singapore  
Phone: 800-1300-955  
Fax: 800-1300-956

Thailand  
Phone: 001-800-1-3-721-1263  
Fax: 001-800-1-3-721-1264

### Latin America

Brazil  
Phone: 000817-762-4732  
Fax: 000817-762-4996

Mexico  
Phone: 001-800-235-1719  
Fax: 001-800-339-1472

Venezuela  
Phone: 800-1-4418  
Fax: 800-1-4419

### Greater China

Beijing  
Phone: (86) 10-6505-5066  
Fax: (86) 10-6505-5077

Hong Kong  
Phone: (852) 2807-2723  
Fax: (852) 2807-2152

Shanghai  
Phone: (86) 21-3222-4668  
Fax: (86) 21-6288-1575

Taiwan  
Phone: (886) 2-2716-0338  
Fax: (886) 2-2716-0339

E-mail: [GCCofic@corning.com](mailto:GCCofic@corning.com)

Corning, LEAF and CPC are registered trademarks and SMF-28 is a trademark of Corning Incorporated, Corning, N.Y.

©2001, Corning Incorporated